

Resene product labels are updated from time to time. This label is provided as a guide for this product and may differ from the label on the container you purchase.
Please discuss your project with your local Resene ColorShop team or reseller to ensure you have the right products to give you the best quality finish for your specific project.

net contents 1 litre

LL5450001 8-24

SAFETY PRECAUTIONS

Read label before use. Keep out of reach of children. Flammable liquid and vapour. May be fatal if swallowed and enters airways. May cause an allergic skin reaction. Causes serious eye irritation. May cause drowsiness or dizziness. Suspected of causing cancer. Suspected of damaging fertility or the unborn child. Toxic to aquatic life with long lasting effects.

PRECAUTIONS

DO NOT BREATHE MIST, VAPOURS OR SPRAY. DO NOT EAT, DRINK OR SMOKE WHILE USING.

Store in original or correctly labelled container, tightly closed, in a well-ventilated area indoors, away from foodstuffs, at an ambient temperature and avoid freezing conditions. Obtain special instructions before use. Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. Wear protective gloves, protective clothing, eye and face protection. Ground and bond container and receiving equipment. Use explosion-proof electrical/ventilating/lighting/intrinsically safe equipment. Use non-sparking tools. Take action to prevent static discharges. Avoid release to the environment.

FIRST AID

IF SWALLOWED: Do NOT induce vomiting. Immediately call a POISON CENTRE, doctor or first aider.

IF ON SKIN (or hair): Wash with plenty of soap and water. If skin irritation or rash occurs get medical advice or attention. Take off contaminated clothing and wash before reuse.

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses if present and easy to do so. Continue rinsing. If eye irritation persists get medical advice or attention.

IF INHALED: If breathing is difficult, remove to fresh air and keep at rest in a position comfortable for breathing. If experiencing respiratory symptoms call a POISON CENTRE, doctor or first aider.

If exposed or concerned get medical advice or attention.

If medical advice is required have product container or label at hand.

Further information can be obtained from

AUST: POISONS INFORMATION CENTRE 131 126 or call Resene 1800 738 383.

NZ: NATIONAL POISONS CENTRE 0800 POISON (764 766)

or call Resene 0800 737 363.

CONTAINS: Methyl ethyl ketoxime 1-7g/L, Naptha petroleum, heavy hydrodesulfurised 260-520g/L, Barium metaborate 13-130g/L.

For use as a surface preparation coating.

For full technical instructions see Data Sheet D411.

SPILLS: Clean up spillage. Wear appropriate protective clothing. Absorb with sand or earth. Collect and seal in properly labelled drums. Do not allow to enter drains or to run off into waterways. Refer to local waste management authority.

CLEANING PAINT EQUIPMENT: Brush/roll out as much paint as possible onto newspaper before washing brushes and rollers. Minimise water used for washing. Dispose of wash-up water onto grassy/unsealed area away from food crop growing areas and NOT into outside stormwater drain where it may harm fish in local waterways. See resene.com/cleanup for cleaning instructions.

FIRE: Use foam, carbon dioxide or dry chemical powder.

DANGER

KEEP OUT OF REACH OF CHILDREN

Resene ArmourX GP Metal Primer general purpose



Resene ArmourX GP Metal Primer is an all-purpose high build primer made with a non-saponifiable resin and a blend of anti-corrosive pigments, ideal for priming new and weathered metals.

Preparation

• Ensure the surface is in sound condition, dry and free from dirt, dust, loose material, oil (including mineral oil-based wood finishes or similar) and salt.

• Remove accumulated windblown salt by washing with Resene Paint Prep and Housewash (see Data Sheet D812).

• Water blasting is the best surface preparation prior to repainting of weathered galvanised steel and Zinalume.

• Treat areas of moss, mould or lichen growth with Resene Moss & Mould Killer (see Data Sheet D80). If lichen is present, allow an extended time for this to detach from the substrate. Water blasting will assist removal of lichen growth. Remove all loose or flaking paint and wash thoroughly as above. Pay particular attention to paint immediately adjacent to flaking areas as adhesion is often suspect.

• Remove oil and grease using Resene Roof and Metal Wash (see Data Sheet D88). Flush clean with water.

• Remove all loose corrosion products (red or white rusting) by thorough power wire brushing or use of a sacrificial disc such as 3M Rust and Paint Removal disc. Spot prime bare areas with Resene ArmourX GP Metal Primer. For badly corroded areas apply an additional coat of Resene ArmourX GP Metal Primer or consult Resene Technical Services for specialist advice.

• On areas showing significant red rusting, apply an additional coat of Resene ArmourX GP Metal Primer or Resene ArmourX Rust-Arrst (see Data Sheet RA30A).

• May be used on roofs used for the collection of drinking water when topcoated. If the roof is used for the collection of drinking water disconnect the downpipes until the total paint system has been applied and has received its first heavy shower of rain. Divert run-off water to a grassed area for the first two to three showers.

• All sanding dusts can be harmful. Always wear appropriate protection. Seek expert advice if working with lead, chromate or asbestos based materials or surfaces.

• This product may be used to paint a wide variety of surfaces. If the

surface you propose to paint is unsound or not referred to, contact your local Resene ColorShop or reseller.

Application

• Apply Resene ArmourX GP Metal Primer by brush, roller or spray. On weathered surfaces, apply by brush or roller to provide the mechanical force to work the surface for intimate contact.

• For new work/weathered unpainted, apply one full coat by brush to ensure maximum contact with the metal. Allow dry time before recoating.


The primer must be hard dry before overcoating. For severe marine exposures and non-rainwashed areas, such as the undersides of metal gutters, apply a second coat of Resene ArmourX GP Metal Primer.

• For repaints, spot prime all bare and lightly rusted areas with one coat of Resene ArmourX GP Metal Primer.

Where severe corrosion is present, apply a second coat of Resene ArmourX GP Metal Primer, allowing dry time between coats.

Be PaintWise

For tips on responsible disposal of paint, cleaning equipment and minimising the impact of your painting on the environment see the Resene website. Do not discharge any paint into the environment. Resene PaintWise accepts residual unwanted paint and packaging. Or contact your Local Authority for disposal information. Please recycle.

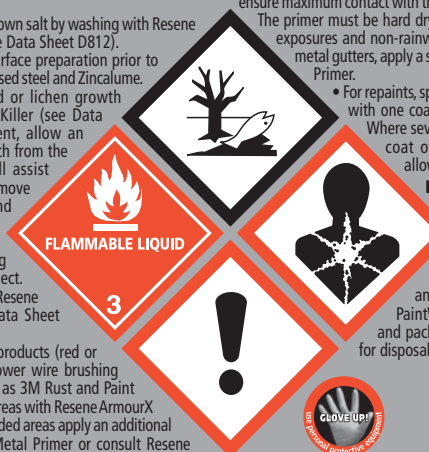

UN NO. 1263 – PAINT RELATED MATERIAL

Resene

the paint professionals use

In Australia: Resene Paints (Aust) Ltd
7 Production Ave, PO Box 918, Ashmore City, Qld 4214
Ph 1800 738 383 Visit resene.com.au
In New Zealand: Resene Paints Ltd
Vogel St, PO Box 38242, Wgtn Mail Centre,
Lower Hutt 5045
Ph (04) 577 0500 Visit resene.co.nz



GP Metal Primer
SDS



GP Metal Primer
TDS

Resene

Automotive & Light Industrial

Resene Automotive & Light Industrial
PO Box 6282, Sylvia Park, Auckland 1644
Ph (09) 259 2738
Visit reseneauto.co.nz
or email us at
info@reseneauto.co.nz

Quick check

Use on: Aluminium, galvanising, repaints, steel and Zinalume.

Gloss level: Satin.

Coverage: 7 square metres per litre per coat.

Dry time (minimum): 5 hours at 20°C (depends upon film build).

Recoat time (minimum): 12 hours at 20°C. Drying is slowed by low temperatures and high humidity. Do not apply under damp conditions.

Usual number of coats: Usually one.

Application method: Brush, roller or spray.

Thinning and clean up: Brush/roller: Mineral turps or Resene Thinner No.2. Spray: Resene Thinner No.6.

Colour range: Light grey.

Before use: Stir well with a wide flat stirrer.

Enjoy the Resene Promise of quality on premium paints. See your Resene ColorShop or the Resene website for a copy.

Read the appropriate Product Data Sheet and Safety Data Sheet before use.

FLAMMABLE LIQUID AND VAPOUR

Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking.

Please ensure that use of this product is compatible with the substrate and surface preparation method and that the colour in this container is the same as selected. Resene does not accept any responsibility for the application of incorrect product to substrate or the application of incorrect colours. Resene products are designed to be used as a system for optimal results. Substitution may cause substandard results or system failure. For further painting advice and information, call 1800 738 383 (AUST), 0800 737 363 (NZ) or visit the Resene website.