

Resene product labels are updated from time to time. This label is provided as a guide for this product and may differ from the label on the container you purchase.
Please discuss your project with your local Resene ColorShop team or reseller to ensure you have the right products to give you the best quality finish for your specific project.

SAFETY PRECAUTIONS

Read label before use. Keep out of reach of children. This material is quite bland; with vapour, occasional skin contact and even minor ingestion having negligible hazard. Repeated skin contact may, and any eye contact will, cause irritation. Harmful to aquatic life with long lasting effects.

PRECAUTIONS

USE WITH ADEQUATE VENTILATION. DO NOT EAT, DRINK OR SMOKE WHILE USING.

Store in original or correctly labelled container, tightly closed, in a well-ventilated area indoors, away from foodstuffs, at an ambient temperature and avoid freezing conditions. Avoid release to the environment.

FIRST AID

IF SWALLOWED: Rinse mouth. Call a POISON CENTRE, doctor or first aider if you feel unwell.

IF ON SKIN (or hair): Rinse skin with plenty of soap and water. If skin irritation or rash occurs get medical advice or attention.

IF IN EYES: Rinse cautiously with water for several minutes. If eye irritation persists get medical advice or attention.

When seeking medical advice take this container with you.

Further information can be obtained from

AUST: POISONS INFORMATION CENTRE 131 126

or call Resene 1800 738 383.

NZ: NATIONAL POISONS CENTRE 0800 POISON (764 766)

or call Resene 0800 737 363.

For use as a cementitious primer.

For full technical instructions see Data Sheet D405.


SPILLS: Wear appropriate protective clothing. Absorb with sand or earth. Collect and seal in properly labelled drums. Do not allow to enter drains or to run off into waterways. Refer to local waste management authority.

CLEANING PAINT EQUIPMENT: Brush/roll out as much paint as possible onto newspaper before washing brushes and rollers. Dispose of wash-up water onto grassy/unsealed area or into inside sink/basin, NOT into outside stormwater drain where it may harm fish in local waterways. See resene.com/cleanup for cleaning instructions.

Resene

Concrete Primer

exterior/interior

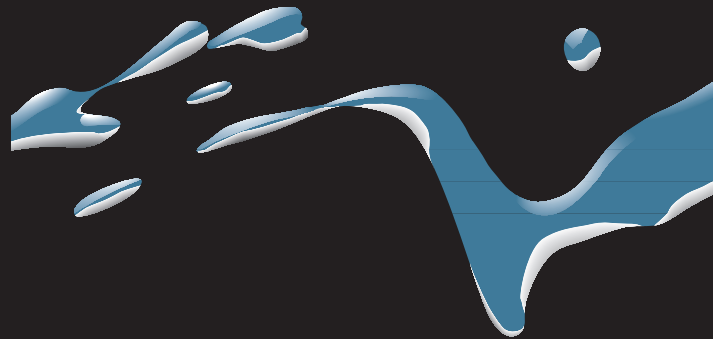

Resene Concrete Primer is designed for direct application to cementitious surfaces, including all concrete, plaster and surfaces, such as fibre cement, to ready them for topcoating. It provides long-term adhesion coupled with exceptional durability even when left uncoated for prolonged periods.

Preparation

• Ensure surface is in sound condition, dry and free from dirt, dust, loose material, oil (including mineral oil-based wood finishes or similar) and salt.

• Remove accumulated windblown salt by washing with Resene Paint Prep and Housewash (see Data Sheet D812).

• Water blasting is the best surface preparation prior to painting of weathered cementitious surfaces.

• If mould is present, treat with Resene Moss & Mould Killer (see Data Sheet D80).

• Efflorescence on masonry must be treated.

• Remove oil and grease with Resene Paint Prep and Housewash. Flush clean with water.

• Where there is a risk of lime staining, apply a coat of Resene Limelock (see Data Sheet D809).

• If the cementitious surface is badly weathered, porous and powdery, apply a saturation coat of Resene Sureseal (see Data Sheet D42) to help bind the surface.

• Ensure all resinous curing membranes are either fully weathered off or removed by physical or chemical means.

• **All sanding dusts can be harmful. Always wear appropriate protection. Seek expert advice if working with lead, chromate or asbestos based materials or surfaces.**

• This product may be used to paint a wide variety of cementitious surfaces. If the surface you propose to paint is unsound or not referred to, try a small test area first or contact your local Resene ColorShop or reseller for advice.

Application

• Do not use where severe water staining exists or as a first coat over metal surfaces.

• Apply one or two coats of Resene Concrete Primer allowing dry time between coats.

• On porous surfaces thin with up to 10% clean water if required.

• Maintain good ventilation throughout the drying and post application curing period to ensure the paint is properly cured. This may require use of an extraction system when painting in marginal painting conditions. Do not use gas or diesel burners to heat the coated area as these produce water that will inhibit drying and curing. Poor ventilation may affect appearance and performance.

Overcoating

• When overcoating with a Resene Uracryl System allow 24 hours before overcoating.

Be PaintWise

For tips on responsible disposal of paint, cleaning equipment and minimising the impact of your decorating on the environment see the Resene website. Do not discharge any paint into the environment. Resene PaintWise (NZ) or paintback.com.au (Australia) accepts residual unwanted paint and packaging. Or contact your Local Authority for disposal information. Please recycle.



Concrete Primer
SDS

Resene

the paint the professionals use



Concrete Primer
TDS

In Australia: Resene Paints (Aust) Ltd
7 Production Ave, PO Box 918, Ashmore City, QLD 4214
Ph 1800 738 383 Visit resene.com.au

In New Zealand: Resene Paints Ltd
Vogel St, PO Box 38242, Wgtn Mail Centre, Lower Hutt 5045
Ph (04) 577 0500 Visit resene.co.nz

Quick check

Use on: All exterior and interior cementitious surfaces.

Gloss level: Low sheen.

Coverage: 12.5 square metres per litre per coat.

Dry time (minimum): 20 minutes at 20°C. Do not apply at temperatures below 10°C or when temperatures are liable to drop below this during drying period. Drying is slowed by low temperatures and high humidity.

Recoat time (minimum): 2 hours at 20°C.

Sealer required: Dependent on surface.

Usual number of coats: One or two dependent on surface porosity.

Application method: Brush, short pile synthetic fibre roller, speed brush or spray. Do not spray the first coat.

Thinning and clean up: Water

Colour: Grey.

Before use: Stir well with a wide flat stirrer.

Enjoy the Resene Promise of quality on premium paints. See your Resene ColorShop or the Resene website for a copy. Read the appropriate Data Sheet and Safety Data Sheet before use.

Please ensure that use of this product is compatible with the substrate and surface preparation method and that the colour in this container is the same as selected. Resene does not accept any responsibility for the application of incorrect product to substrate or the application of incorrect colours. Resene products are designed to be used as a system for optimal results. Substitution may cause substandard results or system failure. For further painting advice and information, call 1800 738 383 (AUST), 0800 737 363 (NZ) or visit the Resene website.



9 418022 026426