

Resene product labels are updated from time to time. This label is provided as a guide for this product and may differ from the label on the container you purchase. Please discuss your project with your local Resene ColorShop team or reseller to ensure you have the right products to give you the best quality finish for your specific project.

DANGER

KEEP OUT OF REACH OF CHILDREN

Resene



Heavy Duty Paint Prep and Oil Remover

concentrate

exterior/interior

net contents 1 litre

LL8469801B 3/20

SAFETY PRECAUTIONS

Read label before use. Keep out of reach of children. Causes skin irritation. Causes serious eye damage. Toxic to aquatic life with long lasting effects.

PRECAUTIONS

DO NOT BREATHE DUST, MISTS, VAPOURS OR SPRAYS. DO NOT EAT, DRINK OR SMOKE WHEN USING THIS PRODUCT. Store in original or correctly labelled container, tightly closed, in a well ventilated area indoors, away from foodstuffs, at an ambient temperature and avoid freezing conditions. Wear protective gloves and clothing, eye and face protection. Avoid release to the environment. Collect spillage.

FIRST AID

IF SWALLOWED: Rinse mouth. Call a POISON CENTRE, doctor or first aider if you feel unwell.

IF ON SKIN (or hair): Wash with plenty of soap and water. If skin irritation occurs get medical advice or attention. Take off contaminated clothing and wash before reuse.

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses if present and easy to do so. Continue rinsing. Immediately call a POISON CENTRE, doctor or first aider.

IF INHALED: Remove to fresh air and keep at rest in a position comfortable for breathing.

If exposed or concerned get medical advice or attention. When seeking medical advice take this container with you.

Further information can be obtained from AUST: POISONS INFORMATION CENTRE 131 126 or call Resene 1800 738 383.

NZ: NATIONAL POISONS CENTRE 0800 POISON (764 766) or call Resene 0800 737 363.

CONTAINS: Alcohols C12-14 Ethoxylated 15-55 gms/L. For use as a paint preparation and house wash.

For full technical instructions see Data Sheet D816.

Resene Heavy Duty Paint Prep and Oil Remover is a biodegradable, phosphate free powerful cleaner for removal of dirt and grease prior to painting.

Preparation

This product may be used to clean a wide variety of surfaces. If the surface you propose to clean is not referred to, try a small test area first or contact your local Resene ColorShop or reseller for advice.

Application

- Mix one part Resene Heavy Duty Paint Prep and Oil Remover to three parts water.
- Wear adequate protection. Use overalls, gloves, eye protection and suitable footwear.
- Scrub vigorously using a nylon bristle broom or short, hard bristle scrubbing brush to remove all dirt, grease, mould and any loose flaking paint.
- Allow cleaner to remain on surface for 5-10 minutes before rinsing by low pressure washing with large volumes of freshwater. DO NOT ALLOW TO DRY ON SURFACE.
- Use more concentrated mixes to clean more heavily soiled surfaces.

CAUTION

- Do not add Resene Heavy Duty Paint Prep and Oil Remover to paint.

Must not be allowed to dry on the surface. Do not apply to glass surfaces, metallic finishes especially aluminium surfaces that will remain unpainted. May dull glossy painted finishes.

Do not allow the product to come into contact with plants. Rinse surrounding vegetation and/or cover at all times while cleaner is in use.

Thoroughly clean the application tool or spray equipment with freshwater immediately after use. Do not store concentrated or diluted product in metal or aluminium containers.

ENSURE PRODUCT IS WELL RINSED OFF GLASS AND METAL SURFACES. CONCENTRATED PRODUCT LEFT ON THESE SURFACES MAY ETCH OR TARNISH THEM.

Enjoy the Resene Promise of quality on premium paints. See your Resene ColorShop or the Resene website for a copy.

In every case it is recommended that the appropriate Data Sheet and Safety Data Sheet are consulted prior to application.

Please ensure that use of this product is compatible with the substrate and surface preparation method. Resene does not accept any responsibility for the application of incorrect product to substrate. For further painting advice and information, call 1800 738 383 (AUST), 0800 737 363 (NZ) or visit the Resene website.

Quick check

Use on: All previously painted surfaces.

Appearance: Pale yellow.


Mixing ratio: One part Resene Heavy Duty Paint Prep and Oil Remover to three parts clean water.

Usage (diluted mix): 10 square metres per litre per coat.

No. of applications: Usually one.

Application method: Brush, knapsack, garden or conventional spray.

Thinning and clean up: Water.

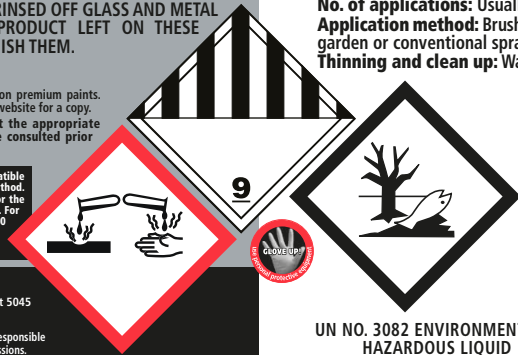

In Australia: Resene Paints (Aust) Limited
7 Production Ave, PO Box 924, Beenleigh, Qld 4207
Ph 1800 738 383 Visit www.resene.com.au

Resene
the paint the professionals use

In New Zealand: Resene Paints Ltd
Vogel St, PO Box 38242, Wgtn Mail Centre, Lower Hutt 5045
Ph 04 577 0500 Visit www.resene.co.nz

Manufactured under a quality system certified as complying with ISO9001 by Telarc SAI, an accredited certification body. Printed on environmentally responsible paper, which meets with the requirements of environmental management system EMAS. Printed using de-inkable toners for recycling with no solvent emissions.

UN NO. 3082 ENVIRONMENTALLY
HAZARDOUS LIQUID