

Resene product labels are updated from time to time. This label is provided as a guide for this product and may differ from the label on the container you purchase. Please discuss your project with your local Resene ColorShop team or reseller to ensure you have the right products to give you the best quality finish for your specific project.

net contents 1 litre

PM3690201 8-24

KEEP OUT OF REACH OF CHILDREN

SAFETY PRECAUTIONS

Read label before use. Keep out of reach of children. This material is quite bland; with vapour, occasional skin contact and even minor ingestion having negligible hazard. Repeated skin contact may, and any eye contact will, cause irritation. Harmful to aquatic life with long lasting effects.

PRECAUTIONS

USE WITH ADEQUATE VENTILATION. DO NOT EAT, DRINK OR SMOKE WHILE USING.

Store in original or correctly labelled container, tightly closed, in a well-ventilated area indoors, away from foodstuffs, at an ambient temperature and avoid freezing conditions. Avoid release to the environment.

FIRST AID

IF IN EYES: Rinse cautiously with water for several minutes. If eye irritation persists get medical advice or attention.

IF SWALLOWED: Rinse mouth. Call a POISON CENTRE, doctor or first aider if you feel unwell.

IF ON SKIN (or hair): Rinse skin with plenty of soap and water. If skin irritation or rash occurs get medical advice or attention.

IF INHALED: If breathing is difficult, remove to fresh air and keep at rest in a position comfortable for breathing. If exposed or concerned get medical advice or attention.

When seeking medical advice take this container with you. Further information can be obtained from

AUST: POISONS INFORMATION CENTRE 131 126

or call Resene 1800 738 383.

NZ: NATIONAL POISONS CENTRE 0800 POISON (764 766) or call Resene 0800 737 363.

For use as a surface preparation coating.

For full technical instructions see Data Sheet D45.

SPILLS: Wear appropriate protective clothing. Absorb with sand or earth. Collect and seal in properly labelled drums. Do not allow to enter drains or to run off into waterways. Refer to local waste management authority.


CLEANING PAINT EQUIPMENT: Brush/roll out as much paint as possible onto newspaper before washing brushes and rollers. Dispose of wash-up water onto grassy/unsealed area or into inside sink/basin, NOT into outside stormwater drain where it may harm fish in local waterways. See resene.com/cleanup for cleaning instructions.

Resene

Quick Dry

waterborne primer undercoat exterior/interior

Use with a
Resene CoolColour
topcoat for a
Resene CoolColour
System.

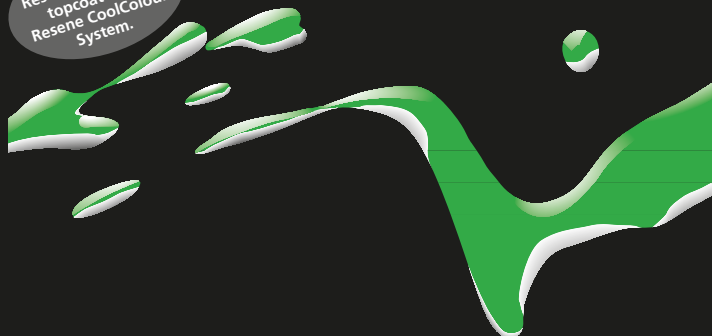

WHITE
If tinted, only tint
to Varishade 1

Resene Quick Dry waterborne primer undercoat is quick and easy to apply and provides long-term flexibility over unstable substrates with exceptional durability even when left uncoated for prolonged periods.

If this product is being used as the primer or undercoat for a Resene CoolColour system either use as white (untinted) or as CoolColour Varishade 1.

Preparation

• Ensure the surface is in sound condition, dry and free from dirt, dust, loose material, oil (including mineral oil based wood finishes or similar) and salt.

• Remove accumulated windblown salt by washing with Resene Paint Prep and Housewash (see Data Sheet D812).

• Water blasting is the best surface preparation prior to painting of weathered cementitious surfaces.

• If mould is present, treat with Resene Moss & Mould Killer (see Data Sheet D80). Efflorescence on masonry **must be treated**.

• Remove oil and grease with Resene Paint Prep and Housewash. Flush clean with water.

• Fill cracks and holes in timber after priming.

• Round all sharp timber edges. Thoroughly sand or treat any bare timber surface that has been left exposed to the weather for more than one week with Resene TimberLock (see Data Sheet D48).

• Thoroughly sand existing gloss enamel painted surfaces to provide a key for subsequent coats.

• Do not use where severe water staining exists or as a first coat over metal surfaces.

• **All sanding dusts can be harmful. Always wear appropriate protection. Seek expert advice if working with lead, chromate or asbestos based materials or surfaces.**

• Exposed bare or cracked timber usually accumulates windblown salt. Before using a totally waterborne system, remove salt by prolonged washing with clean water. Or use a solventborne undercoat.

• Seal plasterboard and stoppings with Resene Broadwall Waterborne Wallboard Sealer in dry areas (see Data Sheet D403) or Resene Sureseal (solventborne see Data Sheet D42 or waterborne see Data Sheet D42a) in wet areas. Seal fibrous plaster with Resene Sureseal.

• Seal hardboard with Resene Sureseal or Resene Waterborne Sureseal to promote the flow of the topcoats.

• Some 'soft' plasterboard preparatory products and under cured gypsum based stoppings may not be suitable basecoats for painting under stressed conditions. If needed, apply a

saturation coat of a fully penetrating primer (such as Resene Sureseal) for reinforcement. Use Resene Sureseal or Resene StainLock (see Data Sheet D408) if the surface is water-stained or has yellowed due to prolonged exposure to sunlight.

• This product may be used to paint a wide variety of surfaces. If the surface you propose to paint is unsound or not referred to, try a small test area first or contact your local Resene ColorShop or reseller for advice.

Application

• Apply one or two coats of Resene Quick Dry allowing dry time between coats. Lightly sand and remove sanding dust between coats.

• Thin with up to 10% clean water when applying onto porous surfaces.

• Maintain good ventilation throughout the drying and post application curing period to ensure the paint is properly cured. This may require use of an extraction system when painting in marginal painting conditions. Do not use gas or diesel burners to heat the coated area as these produce water that will inhibit drying and curing. Poor ventilation may affect appearance and performance.

Overcoating

• Always apply at least two full topcoats.

• Allow 24 hours before overcoating with a Resene Uracryl System.

Be PaintWise

For tips on responsible disposal of paint, cleaning equipment and minimising the impact of your decorating on the environment see the Resene website. Do not discharge any paint into the environment. Resene PaintWise (NZ) or paintback.com.au (Australia) accepts residual unwanted paint and packaging. Or contact your Local Authority for disposal information. Please recycle.



Quick Dry SDS

Resene

the paint professionals use



Quick Dry TDS

In Australia: Resene Paints (Aust) Ltd
7 Production Ave, PO Box 918, Ashmore City, QLD 4214
Ph 1800 738 383 Visit resene.com.au

In New Zealand: Resene Paints Ltd
Vogel St, PO Box 38242, Wairangi Centre, Lower Hutt 5045
Ph (04) 577 0500 Visit resene.co.nz

Quick check

Use on: Exterior and interior surfaces including timber and especially Matai, Spotted Gum and Totara, wallboards (fibre and particle boards), sound cementitious surfaces, wallpaper and cloth and woven wallcoverings. For vinyl wallpaper, use Resene Vinyl Wallpaper Sealer (see Data Sheet D406a) in place of Resene Quick Dry.

Gloss level: Low sheen.

Coverage: 12.5 square metres per litre per coat.

Dry time (minimum): 20 minutes at 20°C. Do not apply at temperatures below 10°C or when temperatures are liable to drop below this during drying period. Drying is slowed by low temperatures and high humidity. Do not apply under damp conditions.

Recoat time (minimum): 2 hours at 20°C.

Usual number of coats: One or two dependent on surface porosity.

Application method: Brush, roller, speed brush or spray. Do not spray the first coat.

Thinning: Thin with up to 10% clean water when applying onto porous surfaces.

Clean up: Water.

Colour: White. If tinted, only tint to Varishade 1. Adding additional tinter can affect performance.

Before use: Stir well with a wide flat stirrer.

Enjoy the Resene Promise of quality on premium paints. See your Resene ColorShop or the Resene website for a copy. Read the appropriate Product Data Sheet and Safety Data Sheet before use.

Please ensure that use of this product is compatible with the substrate and surface preparation method and that the colour in this container is the same as selected. When using multiple packs of this product on the same project please mix them together before use. Resene does not accept any responsibility for the application of incorrect product to substrate or the application of incorrect colours. Resene products are designed to be used as a system for optimal results. Substitution may cause substandard results or system failure. For further painting advice and information, call 1800 738 383 (AUST), 0800 737 363 (NZ) or visit the Resene website.