

Resene product labels are updated from time to time. This label is provided as a guide for this product and may differ from the label on the container you purchase.
Please discuss your project with your local Resene ColorShop team or reseller to ensure you have the right products to give you the best quality finish for your specific project.

SAFETY PRECAUTIONS

Read label before use. Keep out of reach of children. Harmful if swallowed. Causes skin irritation. May cause an allergic skin reaction. Causes serious eye irritation. Harmful if inhaled. May damage fertility or the unborn child. May cause damage to organs. Toxic to aquatic life with long lasting effects. Hazardous to terrestrial vertebrates.

PRECAUTIONS

DO NOT BREATHE MIST, VAPOURS OR SPRAY. DO NOT EAT, DRINK OR SMOKE WHEN USING THIS PRODUCT.

Store in original or correctly labelled container, tightly closed, in a well-ventilated area indoors, away from foodstuffs, at an ambient temperature and avoid freezing conditions. Use only in a well-ventilated area. Wear protective gloves and clothing, eye and face protection. Ground and bond container and receiving equipment. Use explosion-proof electrical, ventilating, lighting and intrinsically safe equipment. Use non-sparking tools. Take action to prevent static discharges. Wash all exposed external body areas thoroughly after handling. Contaminated work clothing should not be allowed out of the workplace. Avoid release to the environment. Obtain special instructions before use.

FIRST AID

IF SWALLOWED: Call a POISON CENTRE, doctor or first aider if you feel unwell.

IF ON SKIN (or hair): Wash with plenty of water. If skin irritation occurs get medical advice or attention. Take off contaminated clothing and wash before re-use.

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses if present and easy to do so. Continue rinsing. If eye irritation persists get medical advice or attention.

IF INHALED: If breathing is difficult, remove to fresh air and keep at rest in a position comfortable for breathing. If experiencing respiratory symptoms call a POISON CENTRE, doctor or first aider.

If exposed or concerned: Call a POISON CENTRE or doctor/physician. If medical attention is required have product container or label at hand.

When seeking medical advice take this container with you.

Further information can be obtained from

AUST: POISONS INFORMATION CENTRE 131 126 or call Resene 1800 738 383.

NZ: NATIONAL POISONS CENTRE 0800 POISON (764 766)

or call Resene 0800 737 363.

For use as a surface preparation coating.

For full technical instructions see Data Sheet D48.

CONTAINS: Naphtha petroleum, light aromatic solvent 180-380 g/L, Xylene 40-150 g/L, Dibutyl Phthalate 5-150 g/L.

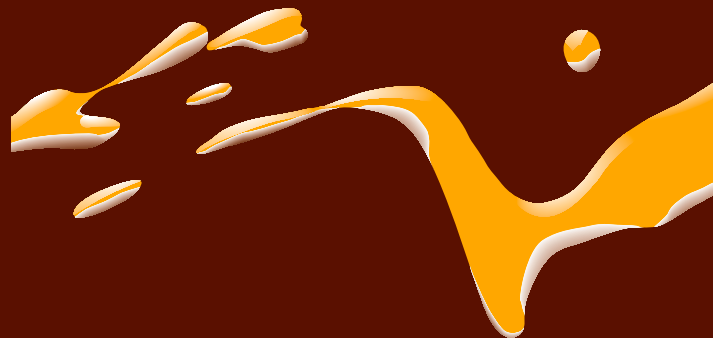
SPILLS: Use appropriate protective clothing. Absorb with sand or earth. Collect and seal in properly labelled drums. Do not allow to enter drains or to run off into waterways. Refer to local waste management authority.

CLEANING PAINT EQUIPMENT: Brush/roll out as much paint as possible on to newspaper before washing out brushes/rollers with Resene Brush Cleaner or mineral turps. Do not allow mineral turps to enter any drains. Refer to your local Council for disposal of dirty mineral turps. See resene.com/cleanup for cleaning instructions.

IN CASE OF FIRE: Use foam, CO₂ dry chemical for extinction.

DANGER

KEEP OUT OF REACH OF CHILDREN

Resene**TimberLock**
preserver/conditioner
exterior

Resene TimberLock is a multi-functional timber treatment designed to increase the water, fungal and U.V. resistance of the wood surface itself, improving the performance of subsequently applied finishes. A penetrating material, it also has the ability to bond the wood fibres laid bare by U.V. and weather attack and re-build them into a wood-like material.

Preparation

- Ensure the surface is in sound condition, dry and free from dirt, dust, loose material, oil (including mineral oil-based wood finishes or similar) and salt.
- Remove accumulated windblown salt by washing with Resene Paint Prep and Housewash (see Data Sheet D812).
- If mould is present, treat with Resene Moss & Mould Killer (see Data Sheet D80).
- Round all sharp timber edges.
- Remove any weakly adhering or flaking paint and sand back loose cellulose fibres. A second treatment with Resene Moss & Mould Killer, and further scraping and sanding, may be required on badly weathered surfaces.

• **All sanding dusts can be harmful. Always wear appropriate protection. Seek expert advice if working with lead, chromate or asbestos based materials or surfaces.**

- This product may be used to condition a wide variety of timber surfaces. If the surface you propose to coat is not referred to, contact your local Resene ColorShop or reseller.

Application

- Use Resene TimberLock on Cedar, exterior timber and to restore badly weathered timber surfaces. Treat new timber with Resene TimberLock and prime before assembly. Treat all faces of the timber paying special attention to the end grains.
- Saturate the surface with Resene TimberLock. The worst weathered surfaces will require a second application.
- Resene TimberLock will not penetrate existing coatings or very hard laterwood bands. Wipe excess Resene TimberLock off with a dry, absorbent, lint free cloth rubbing along the grain. This will ensure maximum adhesion of topcoats.

Precautions

- Contains powerful fungicides. Avoid skin contact and wear gloves when wiping off any excess.
- Resene TimberLock will be less effective if the product is contaminated with water.

- Resene TimberLock must be topcoated with an appropriate system. Do not use under penetrating stains, such as Resene Waterborne Woodsman (see Data Sheet D57a).
- Maintain good ventilation throughout the drying and curing period to ensure the paint is properly cured. Poor ventilation may inhibit curing and performance.

Be PaintWise

For tips on responsible disposal of paint, cleaning equipment and minimising the impact of your decorating on the environment see the Resene website. Do not discharge any paint into the environment. Resene PaintWise (NZ) or paintback.com.au (Australia) accepts residual unwanted paint and packaging. Or contact your Local Authority for disposal information. Please recycle.



UN NO. 1263 – PAINT RELATED MATERIAL

FLAMMABLE LIQUID AND VAPOUR

Keep away from heat, hot surfaces, sparks, open flames and other ignition sources.
No smoking.



Resene
the paint the professionals use



In Australia: Resene Paints (Aust) Ltd
7 Production Ave, PO Box 918, Ashmore City, QLD 4214
Ph 1800 738 383 Visit resene.com.au

In New Zealand: Resene Paints Ltd
Vogel St, PO Box 38242, Wgtn Mail Centre, Lower Hutt 5045
Ph (04) 577 0500 Visit resene.co.nz

Quick check

Use on: Fortify the surfaces of timber prior to the application of topcoats. It is especially useful on porous timber, such as Cedar, and for restoring degraded timber surfaces.

Gloss level: None. Fully penetrating.

Coverage: New dressed timber 10-12 square metres per litre per coat. Badly weathered surfaces may take up to 3 square metres per litre per coat and may require a second application.

Dry time (minimum): 24 hours at 20°C.

Recoat time (minimum): 24 hours at 20°C. Drying is slowed by low temperatures and high humidity.

Primer required: No.

Usual number of coats: One. Apply two coats on badly weathered and rough sawn timber.

Application method: Brush, spray or roller.

Thinning: Do not thin.

Clean up: Mineral turps.

Before use: Stir well with a wide flat stirrer.

Enjoy the Resene Promise of Quality on premium paints. See your Resene ColorShop or the Resene website for a copy.

Read the appropriate Product Data Sheet and Safety Data Sheet before use.

Please ensure that use of this product is compatible with the substrate and surface preparation method and that the colour in this container is the same as selected. Resene does not accept any responsibility for the application of incorrect product to substrate or the application of incorrect colours. Resene products are designed to be used as a system for optimal results. Substitution may cause standard results or system failure. For further painting advice and information, call 1800 738 383 (AUST), 0800 737 363 (NZ) or visit the Resene website.