

Resene product labels are updated from time to time. This label is provided as a guide for this product and may differ from the label on the container you purchase. Please discuss your project with your local Resene ColorShop team or reseller to ensure you have the right products to give you the best quality finish for your specific project.

Quick check

Name: Resene Uracryl 400 Series Hardener.

Mixing ratio: 3 parts Base, 1 part Hardener (by volume).

Induction time: 10-15 minutes.

Pot life: 3-4 hours at 20°C. Increased temperatures will shorten pot life.

Dry time (minimum): 1½ hours tack free at 20°C. Drying is affected by low temperatures and high humidity.

Recoat time (minimum): Brush/roller 12 hours at 20°C.

Thinning and clean up: Resene Thinner No.8 (brush/roller application). Resene Thinner No.7A (spray application).

This hardener is sensitive to moisture. Keep tightly closed when not in use.

Enjoy the Resene Promise of quality on premium paints. See your Resene ColorShop or the Resene website for a copy.

Read the appropriate Product Data Sheet and Safety Data Sheet before use.

CONTAINS ISOCYANATES:

When sprayed, this product may be harmful by inhalation.

Do not breathe vapour or spray.

Avoid contact with skin and eyes.

Wear suitable protective clothing, gloves and eye and face protection including suitable breathing protection such as an air-supplied respirator or hood.

Please ensure that use of this product is compatible with the substrate and surface preparation method and that the colour in this container is the same as selected. Resene does not accept any responsibility for the application of incorrect product to substrate or the application of incorrect colours. Resene products are designed to be used as a system for optimal results. Substitution may cause substandard results or system failure. For further painting advice and information, call 1800 738 383 (AUST), 0800 737 363 (NZ) or visit the Resene website.

net contents 1 litre

Must be mixed with the appropriate base. Makes 4 litres when mixed with 3 litres of any Resene Uracryl 400 Series Base.

PM4700001H 7-24

SAFETY PRECAUTIONS

Read label before use. Keep out of reach of children. Causes serious eye irritation. May cause an allergic skin reaction. Harmful if inhaled. May cause allergy or asthma symptoms or breathing difficulties if inhaled. Harmful to aquatic life with long lasting effects.

PRECAUTIONS

DO NOT BREATHE MISTS, VAPOURS OR SPRAYS. DO NOT EAT, DRINK OR SMOKE WHILE USING.

Store in original or correctly labelled container, tightly closed, in a well-ventilated area indoors, away from foodstuffs, at an ambient temperature and avoid freezing conditions. Wear protective gloves and clothing, eye and face protection. Wash all exposed body areas thoroughly after handling. Contaminated clothing should not be allowed out of the workplace. Take action to prevent static discharges. In case of inadequate ventilation, wear respiratory protection. Ground and bond container and receiving equipment. Use explosion-proof electrical, ventilating, lighting and intrinsically safe equipment. Use non-sparking tools. Avoid release to the environment.

FIRST AID

IF SWALLOWED: Rinse mouth. Call a POISON CENTRE, doctor or first aider if you feel unwell.

IF ON SKIN (or hair): Wash with plenty of soap and water. If skin irritation or rash occurs get medical advice. Take off contaminated clothing and wash before reuse.

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses if present and easy to do so. Continue rinsing. If eye irritation persists get medical advice or attention.

IF INHALED: If breathing is difficult, remove to fresh air and keep at rest in a position comfortable for breathing. If experiencing respiratory symptoms call a POISON CENTRE, doctor or first aider.

Call a POISON CENTRE, doctor or first aider if you feel unwell. If medical attention is required: have product container or label at hand.

Further information can be obtained from AUST: POISONS INFORMATION CENTRE 131 126 or call Resene 1800 738 383.

NZ: NATIONAL POISONS CENTRE 0800 POISON (764 766) or call Resene 0800 737 363.

CONTAINS: Naphtha Petroleum, light Aromatic Solvent 10-110 g/L, Hexamethylene Diisocyanate Polymer 420-750 g/L. For use as a decorative/protective coating.

For full technical instructions see Data Sheets RA54, RA55, RA56 and RA59.

SPILLS: Eliminate all sources of ignition. Wear appropriate protective clothing. Absorb with sand or earth. Collect and seal in properly labelled drums. Do not allow to enter drains or to run off into waterways. Refer to local waste management authority.

CLEANING PAINT EQUIPMENT: Brush/roll out as much paint as possible on to newspaper before washing out brushes/rollers with the recommended thinner. Do not allow thinner to enter any drains. Refer to your local Council for disposal of dirty thinner. See resene.com/cleanup for cleaning instructions.

IN CASE OF FIRE: Use foam, CO₂, dry chemical for extinction.

DANGER

KEEP OUT OF REACH OF CHILDREN

Resene

Uracryl 400 Series

HARDENER

Resene Uracryl is a range of unique high performance two component finish coats with excellent resistance to abrasion, moisture, petroleum solvents and mineral and vegetable oils, alkalis and acids. The most unusual feature of Resene Uracryl is that, unlike most other classes of high performance coatings, it looks as good as it protects. The sophisticated combination of aliphatic urethanes and urethane reactive acrylic resins gives a system unsurpassed for durability and colour retention.

General

• Users of this product should be familiar with The Code of Practice for the Safe Use of Isocyanates issued by OSH before using this product.

• This product comprises a Base and Hardener, which must be mixed in the required ratio using an air or explosion-proof power mixer before application. Mix each component separately before blending them together. Add the total contents of the Hardener container to the total contents of the Base container. Once uniformly mixed, allow to stand for the recommended induction time prior to re-mixing and use.

• Thinning requirements may vary according to application method, equipment and environmental conditions.

• If thinning is required add the recommended thinner after the components have been blended and thoroughly re-mix using the power mixer.

• Ensure the correct wet film thickness is applied to achieve the required dry film thickness. Allow for any thinner added.

• Using the wrong thinner may have an adverse effect on application and performance.

• Drying is affected by low temperatures and high humidity.

• Use the mixed product within the stated pot life. The pot life of the mixed product is given for a specific temperature. Higher temperatures will reduce the pot life, conversely lower temperatures will increase it.

• The temperature of the substrate should be 3°C above the "Dew Point".

• The "Dew Point" requirement can be presumed to be satisfied if a thin clearly defined film of water applied to the cleaned surface with a damp cloth evaporates within 15 minutes.


• Following appropriate preparation, all surfaces must be dry and clean prior to painting.

• This product may be used to paint a wide variety of surfaces. If the surface you propose to paint is

unsound or not referred to, contact your local Resene ColorShop or reseller for your nearest Resene Technical Representative.

Be PaintWise

For tips on responsible disposal of paint, cleaning equipment and minimising the impact of your decorating on the environment see the Resene website. Do not discharge any paint into the environment. Resene PaintWise (NZ) or paintback.com.au (Australia) accepts residual unwanted paint and packaging. Or contact your Local Authority for disposal information. Please recycle.

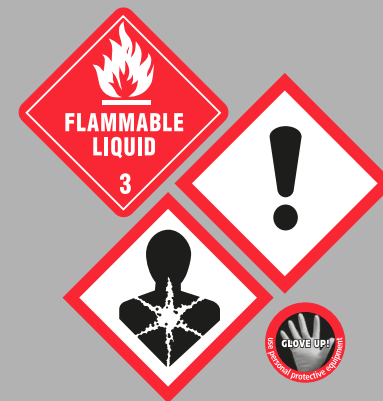

UN NO. 1263 –
PAINT RELATED MATERIAL

FLAMMABLE LIQUID AND VAPOUR
Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking.

Resene

the paint the professionals use

In Australia: Resene Paints (Aust) Ltd
7 Production Ave, PO Box 918, Ashmore City, QLD 4214
Ph 1800 738 383 Visit resene.com.au

In New Zealand: Resene Paints Ltd
Vogel St, PO Box 38242, Wgtn Mail Centre, Lower Hutt 5045
Ph (04) 577 0500 Visit resene.co.nz

Engineered Coating Systems

