

Resene product labels are updated from time to time. This label is provided as a guide for this product and may differ from the label on the container you purchase.

Please discuss your project with your local Resene ColorShop team or reseller to ensure you have the right products to give you the best quality finish for your specific project.

KEEP OUT OF REACH OF CHILDREN

Resene

StainLock

waterborne stain sealer

exterior/interior

A-1L3720004 10/23

SAFETY PRECAUTIONS

Read label before use. Keep out of reach of children. This material is quite bland; with vapour, occasional skin contact and even minor ingestion having negligible hazard. Repeated skin contact may, and any eye contact will, cause irritation.

PRECAUTIONS

USE WITH ADEQUATE VENTILATION. DO NOT EAT, DRINK OR SMOKE WHILE USING.

Store in original or correctly labelled container, tightly closed, in a well-ventilated area indoors, away from foodstuffs, at an ambient temperature and avoid freezing conditions. Avoid release to the environment.

FIRST AID

IF SWALLOWED: Rinse mouth. Call a POISON CENTRE, doctor or first aider if you feel unwell.

IF ON SKIN (or hair): Rinse skin with plenty of soap and water. If skin irritation or rash occurs get medical advice or attention.

IF IN EYES: Rinse cautiously with water for several minutes. If eye irritation persists get medical advice or attention.

When seeking medical advice take this container with you.

Further information can be obtained from

AUST: POISONS INFORMATION CENTRE 131 126

or call Resene 1800 738 383.

NZ: NATIONAL POISONS CENTRE 0800 POISON (764 766)


or call Resene 0800 737 363.

For use as a stain locking sealer on new timbers and old stained surfaces.

For full technical instructions see Data Sheet D408.

SPILLS: Wear appropriate protective clothing. Absorb with sand or earth. Collect and seal in properly labelled drums. Do not allow to enter drains or to run off into waterways. Refer to local waste management authority.

CLEANING PAINT EQUIPMENT: Brush/roll out as much paint as possible onto newspaper before washing brushes and rollers. Dispose of wash-up water onto grassy/unsealed area or into inside sink/basin, NOT into outside stormwater drain where it may harm fish in local waterways.

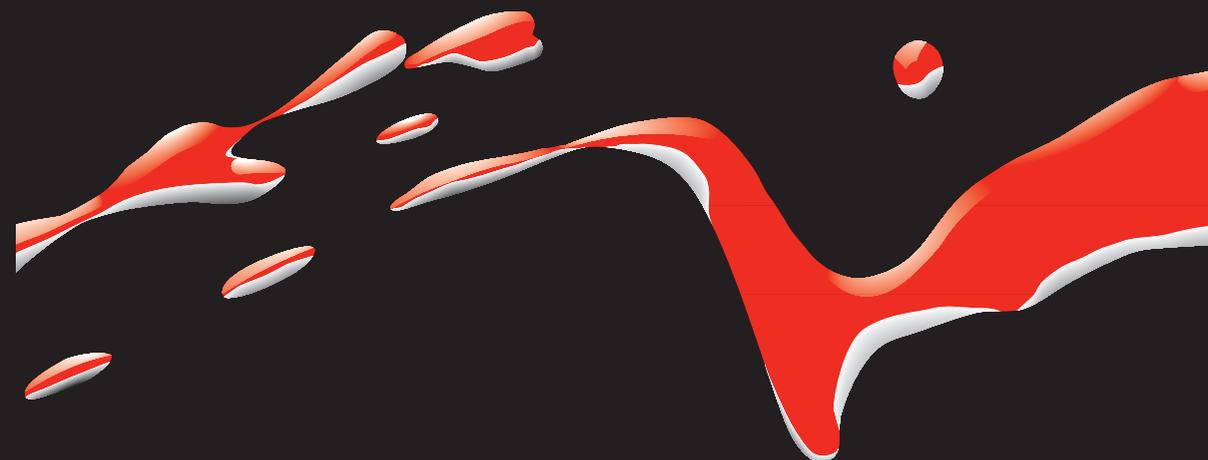

DO NOT TINT

Resene StainLock is a waterborne stain sealer formulated to hold back a wide range of common surface stains to prevent them damaging subsequent topcoats. Designed for overcoating with your choice of Resene waterborne decorative topcoat.

Preparation

• Ensure substrates to be coated are in sound condition, dry, free from dirt, dust, loose material, oil (including mineral oil-based wood finishes or similar) and salt.

• Fill cracks and holes with an appropriate filler before priming.

• If mould is present, treat with Resene Moss & Mould Killer (see Data Sheet D80).

• Wherever oil and grease are present, ensure the surface is thoroughly cleaned using Resene Paint Prep and Housewash (see Data Sheet D812). Flush clean with water.

• Not recommended for use as a first coat over metal surfaces.

• Ensure the source of water has been resolved before coating water-stained areas.

• Where there is a risk of lime staining, a coat of Resene Limelock (see Data Sheet D809) is recommended.

• Prepare plasterboard to an appropriate level of finish. Apply Resene Broadwall Surface Prep & Seal (see Data Sheet D807), Resene Broadwall 3 in 1 (see

Data Sheet D810) or Resene Sureseal (see Data Sheet D42 or waterborne see Data Sheet D42a) followed by lining paper in critical lighting areas.

• **All sanding dusts may be harmful and appropriate protection must be worn. In particular dusts from old lead or chromate-based paints or old building materials containing asbestos may be injurious to health if inhaled or ingested. Seek expert advice if the presence of these materials is suspected.**

• This product may be used to coat a wide variety of surfaces. If the surface you propose to coat is unsound or not referred to, try a small test area first or contact your local Resene ColorShop or reseller for advice.

Application

• Apply one to two coats.

• In typical drying conditions, Resene StainLock may be overcoated after two hours. In cooler weather, Resene StainLock is best overcoated after eight hours with waterborne paints.

• Stains may bleed into Resene StainLock but should remain locked in and not bleed through into subsequent coats.

• When spraying Resene StainLock, ensure that spraylines, pump and gun assemblies are thoroughly cleaned to remove all paint residues that may be present in the spray equipment. Resene StainLock will

loosen and mobilise residual paint within the spray set up and will result in blockages and damage to equipment.

• Maintain good ventilation throughout the drying and post application curing period to ensure the paint is properly cured. This may require use of an extraction system when painting in marginal painting conditions. Do not use gas or diesel burners to heat coated area as these produce water that will inhibit drying and curing. Poor ventilation may affect appearance and performance.

Be PaintWise

For tips on responsible disposal of paint, cleaning equipment and minimising the impact of your decorating on the environment see the Resene website. Do not discharge any paint into the environment. Resene PaintWise (NZ) or paintback.com.au (Australia) accepts residual unwanted paint and packaging. Or contact your Local Authority for disposal information. Please recycle.



Resene
the paint the professionals use



In Australia: Resene Paints (Aust) Limited
7 Production Ave, PO Box 918, Ashmore City, QLD 4214
Ph 1800 738 383 Visit resene.com.au

In New Zealand: Resene Paints Limited
Vogel St, PO Box 38242, Wgtn Mail Centre, Lower Hutt 5045
Ph (04) 577 0500 Visit resene.co.nz

net contents 4 litres

Quick check

Use on: New timber and old stained surfaces. Suitable for blocking timber tannins for interior applications.

Gloss level: Low sheen.

Coverage: 14 square metres per litre per coat.

Dry time (minimum): 30 minutes at 18°C. Do not apply at temperatures below 10°C or when temperatures are liable to drop below this during drying period. Drying is slowed by low temperatures and high humidity.

Recoat time (minimum): 2 hours.

Usual number of coats: One or two dependent on surface porosity. Severe stains may require two coats of Resene StainLock.

Application method: Brush, short pile synthetic fibre roller or speed brush. If spraying, ensure the spray unit is clean and there is no residual waterborne material in the unit and spray lines.

Thinning: In hot conditions may be thinned with up to 5% Resene Hot Weather Additive to slow drying.

Clean up: Water.

Colour: Off white.

Before use: Stir well with a wide flat stirrer.

Cannot be overcoated with two component Resene waterborne paints, such as Resene Aquapoxy and Resene Uracryl 802.

Enjoy the Resene Promise of quality on premium paints. See your Resene ColorShop or the Resene website for a copy.

In every case it is recommended that the appropriate Data Sheet and Safety Data Sheet are consulted prior to application.

Please ensure that use of this product is compatible with the substrate and surface preparation method. Resene does not accept any responsibility for the application of incorrect product to substrate. Resene products are designed to be used as a system for optimal results. Substitution may cause substandard results or system failure. For further painting advice and information, call 1800 738 383 (AUST), 0800 737 363 (NZ) or visit the Resene website.